

$lackbox{ Posey}^{\circ}$ patient safety and protection

Important Instructions

To lock: Push on lid until it clicks shut. Test to be certain it is locked.


To open: Turn key 1/4 turn counter-clockwise.

If the strap does not easily pass through the locking buckle, check to see if there is an obstruction in the lock, or if the strap end is bent or curled. If the strap end is relatively straight and the lock is unobstructed, but the strap still does not pass easily into and through the lock, try the following:

- **1.** With the lock in the "open" position, gently push the strap end into the lock until it meets resistance.
- **2.** With the thumb of the opposite hand, gently push the lock latch down halfway (as if the lock is being closed, but DO NOT close all the way) (Fig. 1).
- **3.** Repeat the process several times until the strap feeds itself through the passage.

Storage and Handling

This device is designed for use in normal indoor environments. This device may be stored in ambient warehouse temperatures at normal humidity levels. Avoid excess moisture or high humidity that may damage product materials.

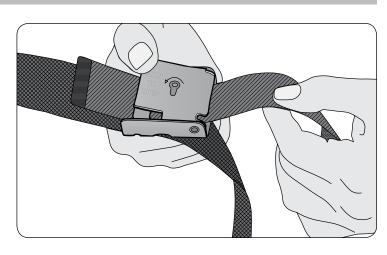

Washing Instructions

Fasten all buckles to minimize damage during wash and dry cycles. For maximum life, launder in a laundry bag.

DO NOT PUT STAINLESS STEEL BUCKLES THROUGH A WATER EXTRACTOR, as it crushes the buckle.

(Please pass this information on to the laundry department.)



TIDI Products, LLC • 570 Enterprise Drive, Neenah, WI 54956 USA Phone: 1.800.521.1314 • International: +1.920.751.4036 • www.tidiproducts.com





© 2024 TIDI Products, LLC. All rights reserved. Posey is a registered trademark of TIDI Products, LLC.

M1660 REV C 03-20-2024

Posey® Keylock Buckle

$lacktrightarrow \mathbf{Posey}^{\mathrm{e}}$ patient safety and protection

Important Instructions

To lock: Push on lid until it clicks shut. Test to be certain it is locked.

To open: Turn key 1/4 turn counter-clockwise.

If the strap does not easily pass through the locking buckle, check to see if there is an obstruction in the lock, or if the strap end is bent or curled. If the strap end is relatively straight and the lock is unobstructed, but the strap still does not pass easily into and through the lock, try the following:

- **1.** With the lock in the "open" position, gently push the strap end into the lock until it meets resistance.
- **2.** With the thumb of the opposite hand, gently push the lock latch down halfway (as if the lock is being closed, but DO NOT close all the way) (Fig. 1).
- **3.** Repeat the process several times until the strap feeds itself through the passage.

Storage and Handling

This device is designed for use in normal indoor environments. This device may be stored in ambient warehouse temperatures at normal humidity levels. Avoid excess moisture or high humidity that may damage product materials.

Washing Instructions

Fasten all buckles to minimize damage during wash and dry cycles. For maximum life, launder in a laundry bag.

DO NOT PUT STAINLESS STEEL BUCKLES THROUGH A WATER EXTRACTOR, as it crushes the buckle.

(Please pass this information on to the laundry department.)



TIDI Products, LLC • 570 Enterprise Drive, Neenah, WI 54956 USA Phone: 1.800.521.1314 • International: +1.920.751.4036 • www.tidiproducts.com



MDSS GmbH Schiffgraben 41 D-30175 Hannover, Germany

